


ローレット加工

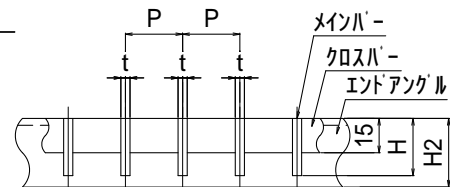

断面詳細

溝幅	型式	A1xB1	A2	D	E	F	H	H2	P	t	エンドアングル
150	SGUR15-15	140 × 1000	194	0	0	67	15	30	10	4	L3 × 30 × 30
	20						13				
	25						15				
180	SGUR18-15	170 × 1000	224	0	0	82	15	30	10	4	L3 × 30 × 30
	20						13				
	25		15								
	32		20				25		30		L3 × 40 × 40
200	SGUR20-15	190 × 1000	244	0	0	92	15	30	10	4	L3 × 30 × 30
	20						13				
	25		15								
	32		20				25		30		L3 × 40 × 40
240	SGUR24-15	230 × 1000	284	100	1	62	15	30	10	4	L3 × 30 × 30
	20						13				
	25		15								
	32		20				25		30		L3 × 40 × 40
300	SGUR30-15	290 × 1000	344	100	1	92	15	30	10	4	L3 × 30 × 30
	20						13				
	25		15								
	32		20				25		30		L3 × 40 × 40
	38		40								
360	SGUR36-15	350 × 1000	404	100	2	72	15	30	10	4	L3 × 30 × 30
	20						13				
	25		15								
	32		20				25		30		L3 × 40 × 40
	38		40								
	424		50				50		L4 × 50 × 50		

1	グレーチング	SUS304	1式	SGUR
品番	品名	材質	個数	備考

図名	U字溝用 フラットバー 4mm ローレットタイプ			符号	SGUR	縮尺
設計	鈴 2009.04.21	照査 木	鈴 2009.04.21	承認 梅 2009.04.21	記事	葉内
	伊藤鉄工株式会社					